


VIBROX

VIBROX IS A FLUID MORTAR FOR CONSTRUCTIVELY FILLING UNDER MACHINE BASES, RAILS AND OTHER ITEMS REQUIRING CASTING WHERE A FAST HIGH COMPRESSIVE STRENGTH IS REQUIRED.

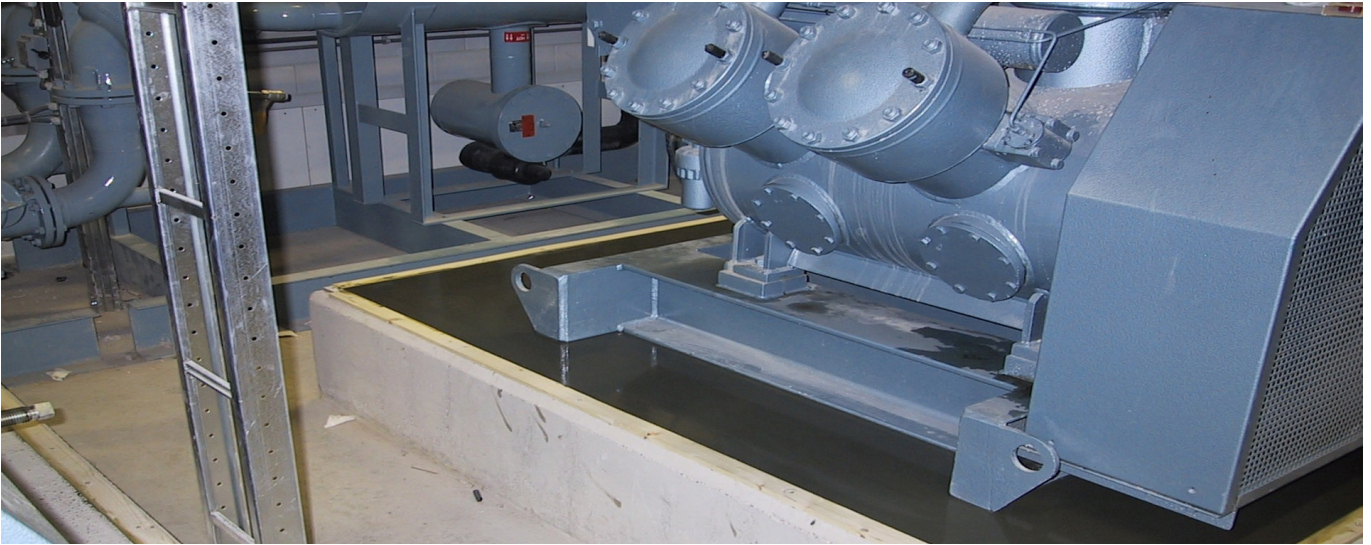

BENEFITS

- Concrete repair product for structural repair according to EN 1504-3
- Very high spread size
- Low reaction temperature
- Non-shrinking
- High pressure resistance
- High impact resistance
- Moisture-insensitive hardening
- Impermeable
- High chemical resistance
- Vibration-proof



FIELD OF APPLICATION

- VIBROX is ideally suited for the casting of high-tech machines that have to operate vibration-free.
- Can be poured in a layer thickness of 4 to 40 mm in one step.
- Good adhesion to various substrates, such as concrete, metal...


VIBROX XL

VIBROX XL IS A FLUID MORTAR FOR CONSTRUCTIVELY FILLING MACHINE BASES AND LARGE VOLUMES.



BENEFITS

- Concrete repair product for structural repair according to EN 1504-3
- Large layer thicknesses in a single application
- High mechanical resistance
- Can be applied inside and outside
- High impact resistance
- Moisture-insensitive hardening
- Impermeable
- High chemical resistance
- No primer required

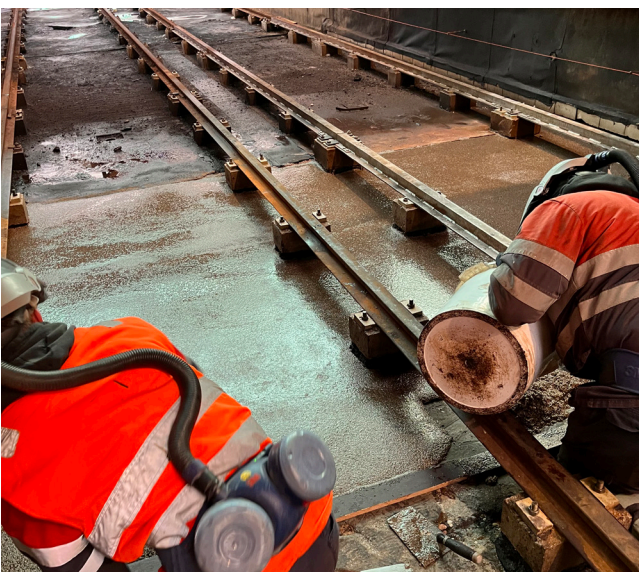

FIELD OF APPLICATION

- The casting mortar is suitable for layer thicknesses of 3 cm to 50 cm in a single application.
- VIBROX XL can also be used as a repair mortar.
- Good adhesion to various substrates, such as concrete, metal...